

S11

THE PLATFORM LIFT




✓ COMFORTABLE
AND SAFE

✓ VERSATILE

✓ QUICK
INSTALLATION

VIMEC
Easy moving



S11

Easy, safe

The S11 platform lift ensures ACCESSIBILITY to:

- **Private premises** (banks, restaurants, shops, offices)
- **Public buildings** (schools, institutes)
- **Homes and residential buildings**

Easy installation and safety when use make S11 an ideal system for freedom of access to buildings of all types, assuring wheelchair users independent personal mobility.



S11 is available in 5 models:

- 1.100 mm
- 1.600 mm
- 2.100 mm
- 2.600 mm
- 2.990 mm



S11 platform lift adapts perfectly to all functional and aesthetic needs

S11 requires a minimal pit, meaning installation is really tailored to the existing structures.



The on-board and floor control panels are equipped with keys and simple to use.



Standard equipment

- Door, guards and gate posts in painted metal (RAL 7040)
- Tower side protection wall in RAL 7040 painted steel / Protection wall opposite to tower in grey polycarbonate
- Hold-to-run controls both on the lift and at the floors
- Emergency stop on lift
- Controls at floor and on lift with removable key
- Manual gate on board with grey polycarbonate cladding (open shaft versions)
- 24 VDC auxiliary circuit
- Automatic overspeed safety valve
- Safety edge-under platform proximity sensors
- Door can be opened from exterior with key
- Anti-crushing edge guard
- Infra red sensors on landing side.

Optionals

- AISI 316 Stainless steel finish
- Automatic doors and gates on Floor
- Radio controls
- Steel post for mounting remote controls
- Motorized gate and 90° exit
- Wireless controls at floor "1"
- A second wireless control on board
- Infra red safety kit


Technical Data

Installation	The S11 may be installed either inside or outside a building in three different ways: - in a free environment - in a masonry shaft - in a steel protective shaft
Versions	Travel up to 1100, 1600, 2100, 2600, 2990
Platforms	Clear dimensions 1250x900; 1400x900; 1400x1100
Finishings	Painted steel (RAL 7040); black structure with RAL 7040 safety edge, gate at first floor, steel tower
Safe working load	up to 400 kg
Speed	0,05 m/sec; 0,10 m/sec for version 2600 and 2990
Voltage	230 V single phase; power 2,2 Kw
Pit	0-165 mm
Safety	Platform finished in non-slip aluminum
Transmission	With electric motor and screw
In conformity with:	the European Directive 2014/35 - Low Voltage the European Directive 2014/30 - EMC the European Directive 2006/42/CE - Machinery Directive (manufacturer's certification)

VIMEC Range

Since 1982 Vimec designs, manufactures and installs customized solutions: home lifts and elevators, chairlifts and stairlifts, platform lifts and mobile stair climbers.

**More than 100.000 installations
all over the world.**

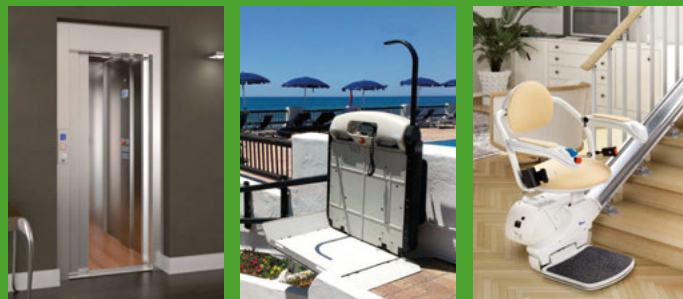

Guaranteed product

Vimec platforms are guaranteed up to 24 months from consignment date.

Vimec Accessibility L.T.D.

Suite 56 Basepoint Business Centre - Caxton Clone
Andover, Hampshire - SP10 3FG
Tel. +44 7780 574 659
Head Office: Luzzara (RE) - Italy
export@vimec.biz
www.vimec.biz

Vimec subsidiaries:

Madrid (Spain)
Avignon (France)
Warsaw (Poland)

