

V64-V65 PLATFORM STAIRLIFTS



- ✓ EASY TO USE
- ✓ COMFORTABLE & SAFE
- ✓ FAST DELIVERY

VIMEC



The platform stairlifts

This range of platform stairlifts **provides safe access to all public and private premises.**

Thanks to the simplicity and comfort of the design, they can be used easily and safely and provide fully independent access to the next level.



Controls with removable key



Wireless attendant control



Strong and reliable

The V64 and V65 platform stairlifts are suitable for installation both indoor and outdoor.

Thanks to the innovative design features the V64 and V65 will continue to perform, even in severe weather conditions.



Automatic safety edges




Technology and safety

V64 and V65 are equipped with wireless carriage and landing control stations. Both the V64 and V65 are available with retractable safety arms. This allows both products to be used even in areas with a reduced headroom and increases the storage options, when the lift is not in use.



V65 with independent bars



Flexibility

The V64 and V65 are available in 3 standard platform lengths.

- **Standard** - 830 mm
A compact platform for installation with small staircases and landings.
- **Large** - 1050 mm
To accommodate all types of wheelchair.
- **Extralarge** - 1250 mm
To meet all transportation needs.




V65 with retracting bars



References

The V64 and V65 have been successfully installed around the world. They have been used to overcome stairs and slopes in all types of buildings and public areas, including museums, subways, banks, restaurants and everything in between. With over 30 years of design and production, the V64 and V65 stairlifts are appreciated for both their versatility and reliability. Thousands of installations worldwide have provided safe & independent access always appreciated for reliability and versatility.

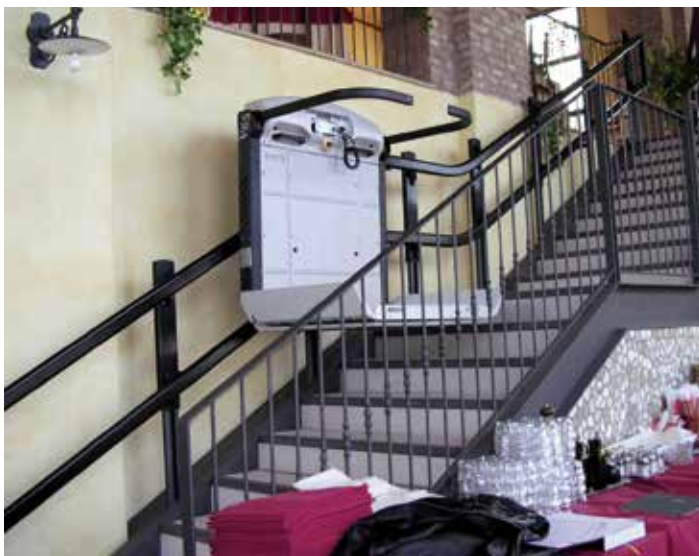



V64

Versatile

The V64 wheelchair platform, travels on a **straight rail** (ideal for one flight of stairs).

Installation of the V64 does not require **any building work** with a full range of platform sizes and rail support options.





V64 Technical Data

Standard features

- Controls protected against unintentional use, constant pressure operated
- Key switch control on both landing and carriage controls including removable keys
- Emergency stop button
- Emergency manual lowering device
- Progressively operated mechanical safety gear
- Speed limiter
- Automatic safety edges
- Handrail support
- Electronic safety limit switches
- Shock-absorption device, anti-shearing device anti-crushing devices
- **Audio & visual overload alarm**
- **Preset for EN81/40**

Optionals

- Protective cover (large for outdoor, small for indoor)
- Automated platform folding
- Special size platform
- Audible "Lift in motion" alarm
- Visual "Lift in motion" alarm
- Folding seat
- Remote control post
- Retracting arms
- Radio controls



V64 with automated platform folding



Safety and Comfort



Technology and Simplicity



Flexibility (3 models)



Easy to install

Technical Data

| | STANDARD | LARGE | EXTRALARGE |
|--|---------------|---------------|---------------|
| Minimum stair width (mm) | 970 | 1040 | 1070 |
| Tolerated gradient (degrees) | from 0 to 50° | from 0 to 50° | from 0 to 50° |
| Minimum size of rail (mm) | 100 | 100 | 100 |
| Minimum size with folded platform (mm) | 370 | 370 | 370 |
| Platform dimensions (mm) | 830x700 | 1050x770 | 1250x800 |
| Capacity up to 45° | 300 kg | 300 kg | 250 kg |
| Capacity beyond 45° | 200 kg | 200 kg | 200 kg |
| Speed | 5 m / min. | 5 m / min. | 5 m / min. |
| Power supply | 230 Volt | 230 Volt | 230 Volt |
| Power consumption | 0,75 kW | 0,75 kW | 0,75 kW |
| Available with capacities up to 300 kg | | | |

The data refer to the version without seat and without frontal access. This data is indicative and not binding. Vimec reserves the right to change the specifications without prior notification.

In conformity with:

- the European Directive 2014/35/CEE - Low Voltage
- the European Directive 2014/30/CEE - EMC
- the European Directive 42/2006/CEE - Machinery Directive (manufacturer's certification)



V65

Quiet and energy-saving

V65 is the **curved inclined** platform stairlift. It is able to manage both constant or variable stair and slope gradients. It easily adapts to the incline variation of a landing or flight of stairs.

Thanks to the combination of a power supply and rechargeable battery technology, the V65 guarantees smooth and quiet operation whilst minimising power usage.



The V65 stairlift ensures comfort and safety over any kind of path




V65 Technical Data

Standard features

- Controls protected against unintentional use, constant pressure operated
- Removable key
- Emergency stop
- Manual emergency manoeuvre
- Progressively operated mechanical safety gear
- Speed limiter
- Automatic safety edges
- Supporting handle
- Electric safety limit switches
- Shock-absorbing, anti-shearing, anti-crushing devices
- **Blackout emergency battery back up**
- **Audio & visual overload alarm**

Optionals

- Protective cover (large for outdoor, small for indoor)
- Automated platform folding
- Special size platform
- Audible "lift in motion" alarm
- Visual "lift in motion" alarm
- Intermediate stops
- Folding seat
- Remote control post
- Retracting bars that fit into the actual body of the machine (excluding 1250x800 platform)
- Radio controls



V65 with folding seat

Technical Data

| | STANDARD | LARGE | EXTRALARGE |
|--|---------------|---------------|---------------|
| Minimum stair width (mm) | 1130 | 1250 | 1320 |
| Tolerated gradient (degrees) | from 0 to 50° | from 0 to 50° | from 0 to 50° |
| Minimum size of rail (mm) | 160 | 160 | 160 |
| Minimum size with folded platform (mm) | 430 | 430 | 430 |
| Platform dimensions (mm) | 830x700 | 1050x770 | 1250x800 |
| Capacity up to 45° | 300 kg | 300 kg | 250 kg |
| Capacity beyond 45° | 200 kg | 200 kg | 200 kg |
| Speed | 8 m /min. | 8 m /min. | 8 m /min. |
| Power supply | 230 Volt | 230 Volt | 230 Volt |
| Power consumption | 1 kW | 1 kW | 1 kW |

Available with capacities up to 300 kg

The data refer to the version without seat and without frontal access. This data is indicative and not binding. Vimec reserves the right to change the specifications without prior notification.

In conformity with:

- the European Directive 2014/35/CEE - Low Voltage
- the European Directive 2014/30/CEE - EMC
- the European Directive 42/2006/CEE - Machinery Directive (manufacturer's certification)



VIMEC Range

Since 1982 Vimec designs, manufactures and installs customized solutions: home lifts and elevators, chairlifts and stairlifts, platform lifts and mobile stair climbers.

**More than 110.000 installations
all over the world.**



Guaranteed product

Vimec Platform stairlifts are guaranteed up to 24 month.

Vimec Accessibility L.T.D.

Suite 56 Basepoint Business Centre - Caxton Close
Andover, Hampshire - SP10 3FG
Tel. +44 7780 574 659
Head Office: Luzzara (RE) - Italy
export@vimec.biz
www.vimec.biz

Vimec subsidiaries:

Madrid (Spain)
Avignon (France)
Warsaw (Poland)

